

MILLENIUM METREX™

METMSU SERIES

PRODUCT FEATURES:

- » Surface mount – wall or ceiling;
Single Face
- » Indirect LED with life up to 50,000 hours
- » Custom legend plate



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS

HOUSING: High impact, injection molded polycarbonate. Housing provided with canopy mounting and wireway drill points top and side – see Cross Section/Details. Closed cell die-cut Neoprene gasket seals housing to canopy.

SHIELD: UV-stabilized, high impact, injection molded clear polycarbonate. Nominal thickness .120". Corrosion resistant Phillips head fasteners secure shield to housing. Continuous closed cell silicone gasket seals shield to housing.

CANOPY: High impact, injection molded polycarbonate canopy cover with heavy gauge galvanized steel mounting plate with integral 1/4-20 threaded studs. Canopy mounting plate provided with four-point mounting holes, one wireway hole and temporary junction box mounting holes. Closed cell die-cut Neoprene gasket seals canopy to mounting surface.

LEGEND: Legend illuminated by internal high output LEDs. Lettering height and stroke determined by legend option. Polycarbonate red or green filter panels. Stencil is 18-gauge laser cut steel with TGIC polyester powder coat finish to match housing.

ELECTRICAL: 624 nm Red or 527 nm Green LED light source. Electrical components mounted to removable high impact, injection molded polycarbonate chassis. Drill points provided for optional conduit entry.

OPTIONS: Tamper Resistant Torx® with center pin Fasteners.

INSTALLATION: Standard four-point mounting required for [Peace of Mind Guarantee®](#).


LISTINGS: UL and CUL listed for Wet Location. Meets or exceeds UL48. NSF2 Splash/Non-Food Zone.



ORDERING INFORMATION (Ex: METMSU-MW-R-DNE-DT)

Model	Finish	Legend Color	Legend Options	Voltage	Options
METMSU					
	Finish		Legend Options	Voltage	Options
	MB Matte Black		IU IN USE	DT 120/277 Volts	TR* Tamper Resistant Torx® T-20 with center pin Fasteners
	MW Matte White		XIU X-RAY IN USE	DTC 120/347 Volts	
	Legend Color		OCC OCCUPIED		*n/a with NSF2 listing
	R Red		MIU MRI IN USE		
	G Green		BIU BEAM IN USE		
			DNE DO NOT ENTER		
			CSL Customer Specified Legend (Consult Factory)		

DIMENSIONAL DATA

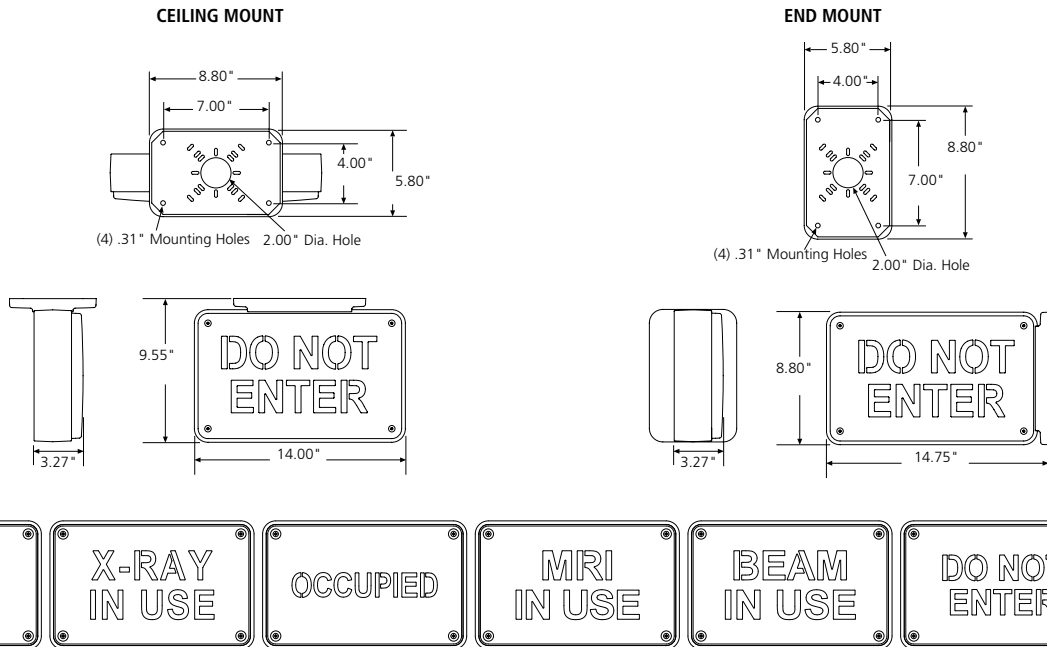

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.