

MEDMASTER SOFTSTEP™ STEPLIGHTS

Patient Room Steplight

MSL SERIES – FABRICATED

PRODUCT FEATURES:

- » Recessed wall mount – Rectangle available in horizontal or vertical orientation
- » NSF2 listing for cleanability
- » White, Amber, or Red LED lamp options
- » ADA Compliant



MSLS



MSLR-H



MSLR-V

SPECIFICATIONS

HOUSING: 18-gauge CRS. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Four .875" knockouts.

FACEPLATE: 18-gauge CRS (powder coated) or Type 304 Stainless Steel. Faceplate secured to housing with stainless steel screws. Internal louver is positioned behind lens for easy cleaning of entire faceplate. See Faceplate Finish in Ordering Information for color selection.

LENS: Polycarbonate, acrylic or tempered glass lens. Polycarbonate and acrylic lens available in clear, prismatic or translucent white. Tempered glass available in clear or prismatic.

ELECTRICAL: 120VAC or 277VAC 60Hz input. Available in white, red, or amber LED.

INSTALLATION: Two adjustable mounting brackets for new construction.

PHOTOMETRICS: Photometry tested to the IESNA LM-79-08 standard by an ILAC/ISO17025 accredited laboratory. For additional photometric information, go to www.kenall.com.

WARRANTY: Limited five (5) year LED warranty.

LISTINGS: UL and CUL Listed for Damp Location. See Option for Wet Location listing. NSF2 Splash/Non-Food Zone.



ORDERING INFORMATION (Ex: MSLR-H-F-0-GW-CP-WLL-120-2)

Model	Faceplate	Faceplate Material	Faceplate Finish	Lens Type	Lamp Type	Voltage	Fasteners	Option	Packaging
Model			Faceplate Finish			Voltage			
MSLR-V	Rectangle Vertical		GW Gloss White Antimicrobial			120 120 Volts			
MSLR-H	Rectangle Horizontal		MW Matte White Antimicrobial			277 277 Volts			
MSLS	Square		MB Matte Black Antimicrobial						
			BE Beige					Fasteners	
			DB Dark Bronze					2 Torx Head w/Center pin (2)	
			LG Light Gray					3 Phillips-head Fasteners (2)	
			IV Ivory						
			CS Cool Satin Painted Anodized					Option	
			WS Warm Satin Painted Anodized					WL Wet Location Listed	
			BSS Brushed SS (only available with Faceplate Material Option 1)						
				Lens Type					
				Polycarbonate					
				CP* Clear Polycarbonate					† n/a with clear lens
				PP Pearlescent Polycarbonate					* Internal Louver (L) available with clear lens option only
				2 .125" #12 Prismatic Polycarbonate					**Rough-In Box (Box 1), Fixture Section (Box 2)
				Acrylic					
				T* .125" Clear High Impact Acrylic					
				PIA Pearlescent Acrylic					
				U .125" #12 Prismatic High Impact Acrylic					
				Tempered Glass					
				8* .187" Clear Tempered Glass					
				TG .188" Textured Tempered Glass					
				Lamp Type					
				Low Lumen					
				WLL 4000K White Low Lumen LED (0.05A/0.55W)					
				ALL Amber LED (0.05A/0.50W)					
				RLL Red LED (0.05A/0.50W)					
				High Lumen					
				WHL 4000K White High Lumen LED (0.10A/1.10W) (n/a w/Square)					






MEDMASTER SOFTSTEP™ STEPLIGHTS

Patient Room Steplight

MSL SERIES – FABRICATED

DIMENSIONAL DATA

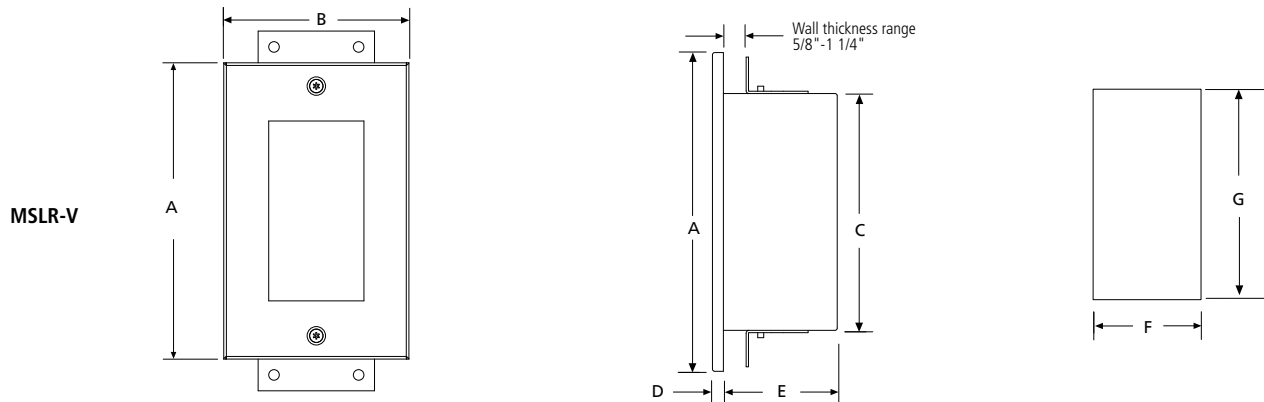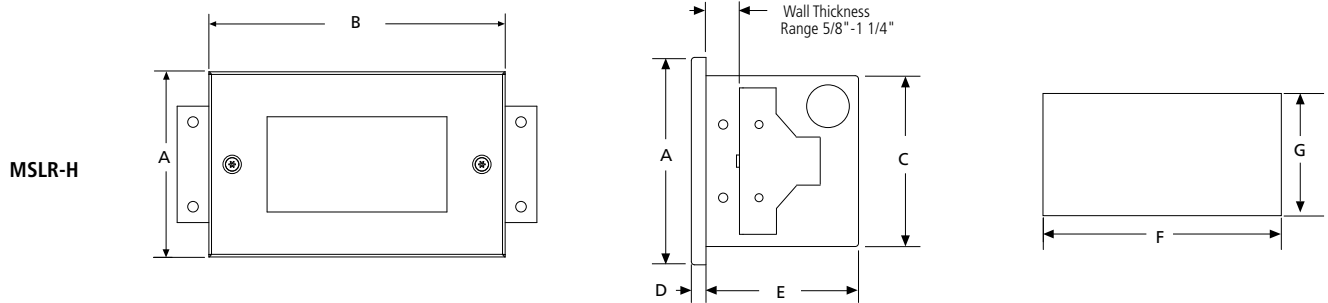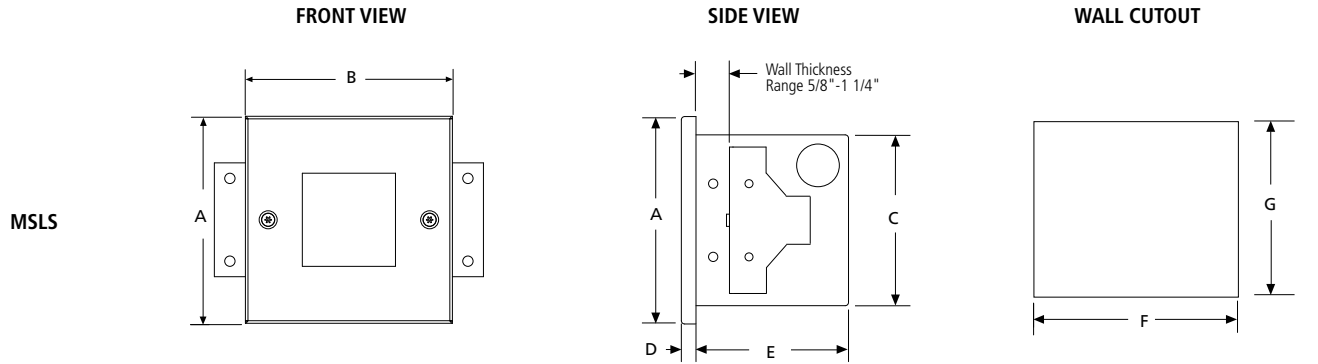

DIMENSIONAL DATA (IN INCHES)							
	A	B	C	D	E	F	G
MSLS	5.00	5.00	3.25	0.30	3.12	4.63	3.38
MSLR-H	4.38	7.00	3.25	0.30	3.12	6.63	3.38
MSLR-V	7.00	4.38	6.50	0.30	3.12	3.38	6.63



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.