

SHERIFF™

SH548 SERIES FOR WET WALL MOUNT LOCATIONS

PROJECT INFORMATION

Job Name _____


Fixture Type _____

Catalog Number _____

Approved by _____

PRODUCT FEATURES:

- » Surface wall mount – 5"×48"
- » ADA Compliant
- » 16-gauge cold rolled steel baseplate with seam welded end caps
- » P12 polycarbonate wraparound lens
- » Peace of Mind Guarantee® against breakage

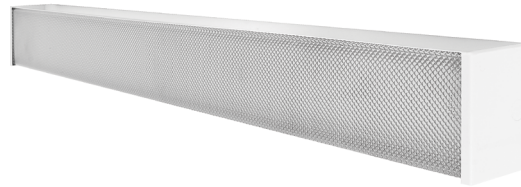

SPECIFICATIONS

BASEPLATE: One-piece 16-gauge CRS baseplate with welded corners. Baseplate provided with six-point mounting holes and one wireway hole – see Cross Section/Details. TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Lens is positioned in baseplate channels and retained with six stainless steel Torx® fasteners Baseplate/end caps mount flush to wall surface.

LENS: Cold formed .156" P12 polycarbonate lens. See Options for alternate lenses.

SOCKETS: Shock-resistant sockets with internal locking collar to ensure positive lamp retention.

HARDWARE: Stainless steel Torx® T-20 with center pin fasteners secure lens in baseplate channel.

ELECTRICAL: Class P ballasts. Fluorescent electronic 120/277/347 and dual voltage ballasts high power factor.

INSTALLATION: Six-point mounting required for Peace of Mind Guarantee®.

LISTINGS: UL and CUL listed for Wet Location. (Horizontal wall mount only.)




ORDERING INFORMATION (Ex: SH548W-2-32-RS-1-DV-FS)

Model	Lamp Qty	Lamp Type	Ballast Type	Ballast Qty	Voltage	Options
SH548W						
Lamp Quantity		Ballast Type		Options		
1	One Lamp	IS	Instant Start Electronic <10% THD (T8)	EL	Standard Lumen Battery Pack (32°F one-lamp operation)	
2	Two Lamps (T5,T8,40B)	RS	Rapid Start Electronic <10% THD (CFL, T8, T5, T5HO)	.187	.187" P12 Polycarbonate Lens	
3	Three Lamps (T8 only)	SB	Specified Ballast	AL	Marine Grade Aluminum Housing	
Lamp Type		Ballast Quantity		BSS	Brush Stainless Steel Housing	
28	F28T5	1	One	DLN	LED Night Light w/Light Level Control (100% - 20%)	
32	F32T8	2	Two	FS	Single Fuse & Holder	
54*	F54T5HO			KO	Two 1/2" EMT Conduit Entry Knockouts (one per end cap)	
40B	F40TT (2)			OP	Opal Polycarbonate Lens	
		Voltage		PSS	Painted Stainless Steel Housing	
		120	120 Volt	TN	5 Watt Twin Tube NPF Night Light (n/a w/ 347V or DV)	
		277	277 Volt			
		347	347 Volt			
		DV	120-277 Volts			

*Available with one lamp only

DIMENSIONAL DATA

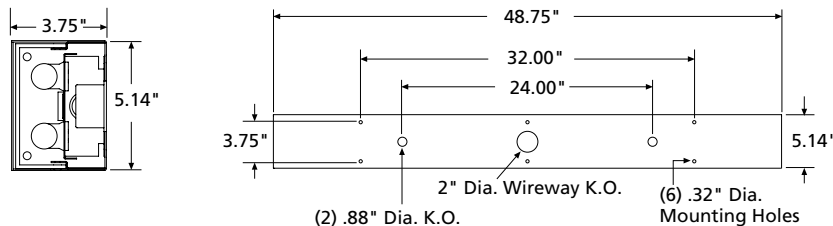

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.